


BATTERY/CHARGING SYSTEM

Connect the battery cables only when the Power switch is OFF.

5. Turn the Power Switch to the ON position.
6. When the timer reaches the "Trickle" position, the charging cycle is complete. Turn the Power Switch OFF and disconnect the clamps.
7. Let the battery cool for at least 10 minutes or until gassing subsides after charging.
8. Reset the battery using the Honda Battery Tester and recharge if necessary using the above steps.

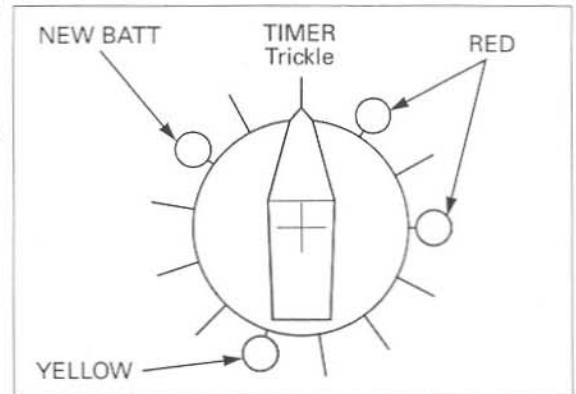

BATTERY TRAY


REMOVAL/INSTALLATION

Remove the following:


- Rear fender (page 3-16)
- Muffler (page 3-20)
- Battery (page 17-5)
- Fuel tank (page 6-61)

Remove the two socket bolts and left footpeg bracket.

Remove the battery tray mounting bolts.

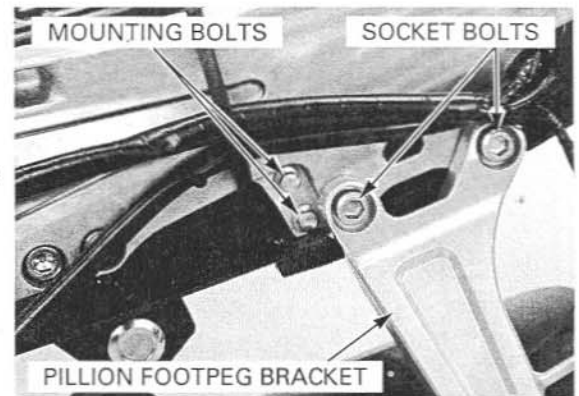

Remove the battery tray front mounting screw and bolt.

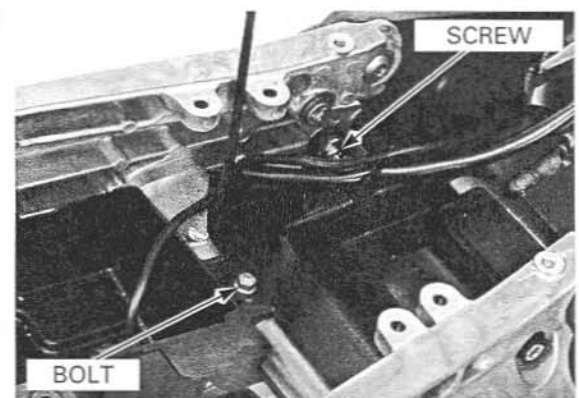

Remove the battery tray rear mounting screw.

Remove the starter relay and fuse box from the battery tray.

