


---

Install L. crankcase and tighten bolts

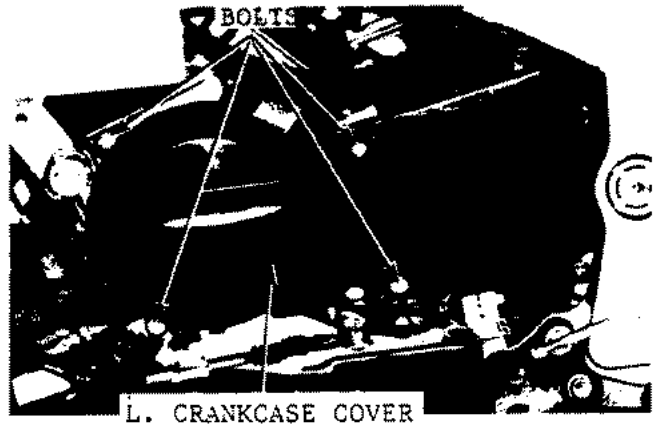

Connect pulse generator coupler and AC generator coupler

Install lower fairing, side covers and seat (section 15)

