


## HANDLEBARS

### Removal


Remove the following from R. Handle

- master cylinder
- handle switches
- handle weight
- throttle grip

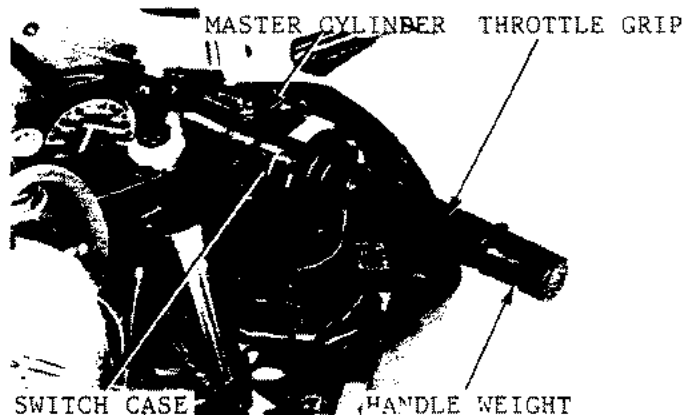


Remove following from L. handle

- clutch lever bracket
- handle switch case
- handle weight
- handle grip
- choke lever

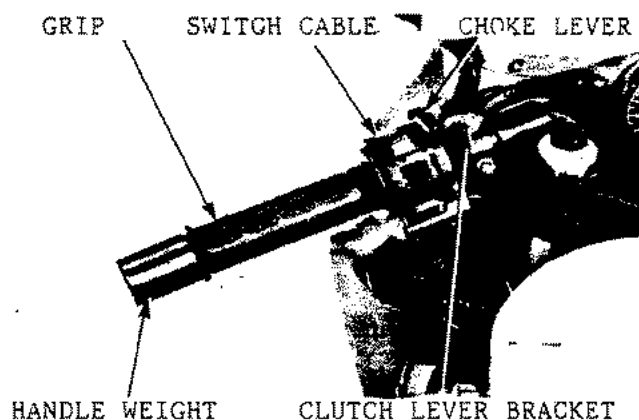

Remove steering top bridge ( 12.18)

Loosen handle bolts and remove handlebars

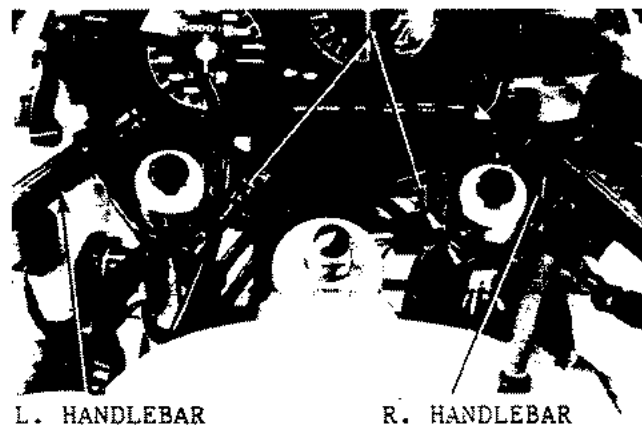

### Installation

Check that left and right front fork grooves have stopper rings fitted

