


Install cushion arm bolt and rear
cushion lower bolt and tighten

Torque: Cushion arm bolt: 6.0-7.0 kg-m
R.cushion lwr bolt: 6.0-7.0kg-m

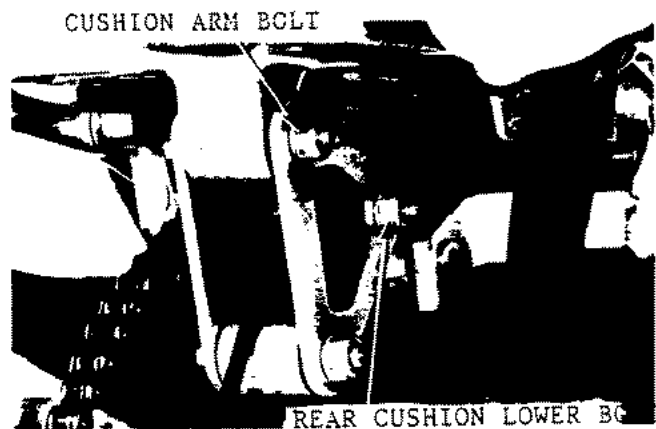

Align rear caliper bracket protrusion
with rear fork index mark and install

Install rear fender B (15.8)
Install rear wheel (13.7)

