


Install the rear brake caliper/bracket assembly onto the boss of the swingarm.

Install the rear brake hose in the clamps.

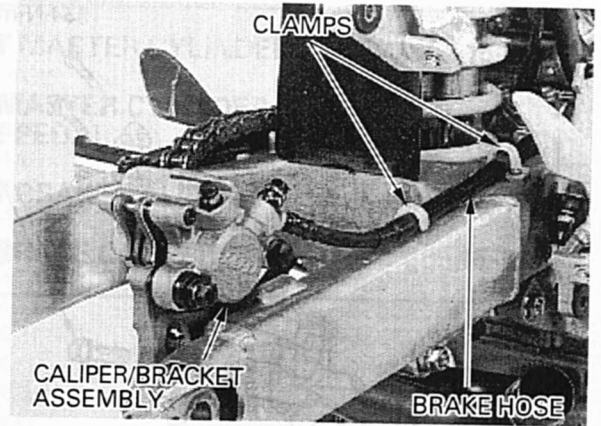

Install the drive chain cover aligning the slot with the boss of the swingarm, and tighten the two bolts.

Install the rear wheel (page 14-8).

Install the left and right mufflers (page 2-6).

