


Front Suspension Adjustments

13. Pour the recommended fork oil (11) into the fork assembly (1).

Recommended Oil:
Honda ULTRA CUSHION OIL SPECIAL 5 W
or equivalent.




(1) fork assembly

(11) fork oil


Fork Oil Capacity (ED, U, CM, IICM type):

Standard 0.47 kgf/mm (26.32 lbf/in) Fork Spring

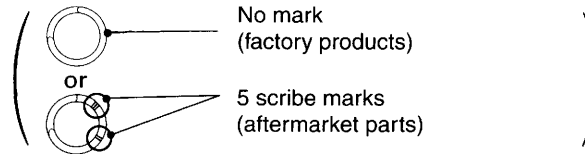


Standard oil capacity	406.5 cm ³ (13.75 US oz) (14.31 Imp oz)	
Maximum oil capacity	419 cm ³ (14.2 US oz) (14.7 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	323 cm ³ (10.9 US oz) (11.4 Imp oz)	Slightly softer as it nears full compression.

Optional Softer 0.45 kgf/mm (25.20 lbf/in) Fork Spring

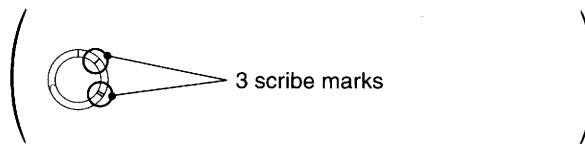

Standard oil capacity	404 cm ³ (13.7 US oz) (14.2 Imp oz)	
Maximum oil capacity	416 cm ³ (14.1 US oz) (14.6 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	320 cm ³ (10.8 US oz) (11.3 Imp oz)	Slightly softer as it nears full compression.

Optional Stiffer 0.49 kgf/mm (27.44 lbf/in) Fork Spring

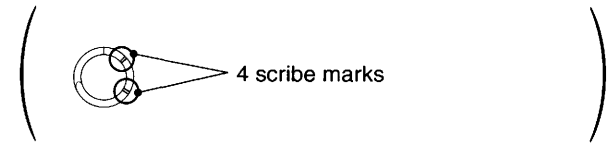

Standard oil capacity	401 cm ³ (13.6 US oz) (14.1 Imp oz)	
Maximum oil capacity	413 cm ³ (14.0 US oz) (14.5 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	317 cm ³ (10.7 US oz) (11.2 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.

(cont'd)