

# Final Drive Oil


## Oil Recommendation

type	hypoid gear oil
viscosity (weight)	SAE 80

## Checking & Adding Oil

Refer to *Safety Precautions* on page 154.

### RIGHT REAR

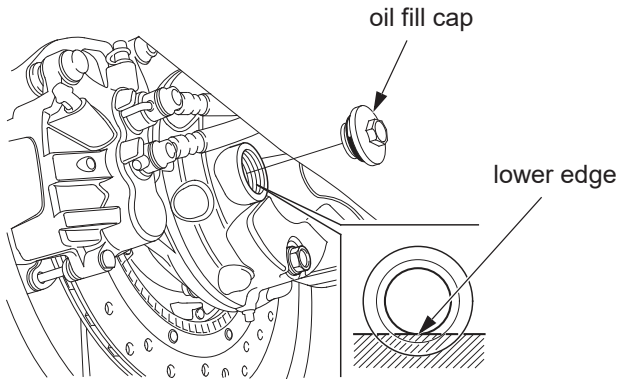

1. Place the motorcycle on its center stand on a firm, level surface.
2. Remove the oil fill cap.
3. Check the oil level. It should be flush with the lower edge of the oil fill hole.
4. If the level is low, check for oil leaks. Add the recommended oil through the oil fill hole until it reaches the lower edge of the opening.
5. Install the oil fill cap.